
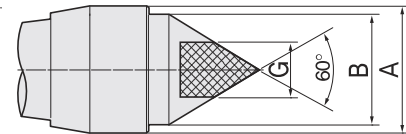


WP

FEATURES ;

- Accuracy guaranteed to 0,003mm TIR (0,0001").
- Excellent for CNC lathes, grinding machines and inspection machines,
- Water proof enhanced type,
- Heat-treated point to HRC 60±2,
- Small head diameter reduces interference problem between tool holders and turning tools,
- Carbide point available (WPC TYPE),
- Carbide point to HRA 90±5,

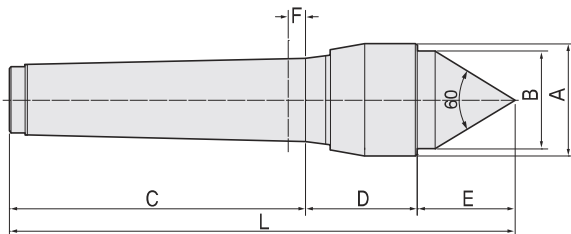

Available

Carbide Tipped Points WPC-TYPE

- MT2 : 072002
- MT3 : 072003
- MT4 : 072004
- MT5 : 072005


Dimension

Unit : mm, kg

MODEL	MT	A	B	C	D	E	F	G	L	Workpiece Weight	Max, R.P.M	Weight	Max, Run Out
071002 (072002)	2	27.7	23.8	69	28	23	4.5	10	120	200	4,000	0.3	0.003
071003 (072003)	3	32.3	28	85	32	28	5	10	145	400	3,000	0.4	0.003
071004 (072004)	4	45	40	108	48	38	6	14	194	700	3,000	1.1	0.003
071005 (072005)	5	62	54	136	54	51	8	18	241	1,300	2,000	2.7	0.003

* (MODEL NO) : Carbide Tip Type



WP type technical data

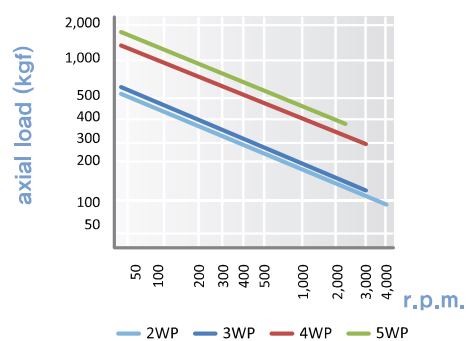

WPL30

FEATURES ;

- Accuracy guaranteed to 0,003mm TIR (0,0001").
- Excellent for CNC lathes, grinding machines and inspection machines.
- Water proof enhanced type.
- Heat-treated point to HRC 60±2.
- Small head diameter reduces interference problem between tool holders and turning tools.
- Carbide point available (WPL30C TYPE).
- Carbide point to HRa 90±5.

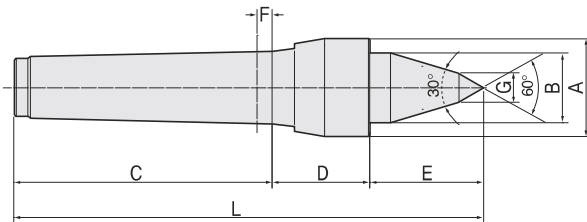

Available

Carbide Tipped Points **WPL30C-TYPE**

- MT2 : 074002 · MT5 : 074005
- MT3 : 074003
- MT4 : 074004



Dimension

Unit : mm, kg

MODEL	MT	A	B	C	D	E	F	G	L	Workpiece Weight	Max, R.P.M	Weight	Max, Run Out
073002 (074002)	2	27.7	23.8	69	28	35	4.5	12	132	120	4,000	0.3	0,003
073003 (074003)	3	32.3	28	85	32	45	5	12	162	320	3,000	0.5	0,003
073004 (074004)	4	45	40	108	48	65	6	14	221	560	3,000	1.2	0,003
073005 (074005)	5	62	54	136	54	90	8	16	280	1,000	2,000	3.2	0,003

※ (MODEL NO) : Carbide Tip Type



WPL30 type technical data

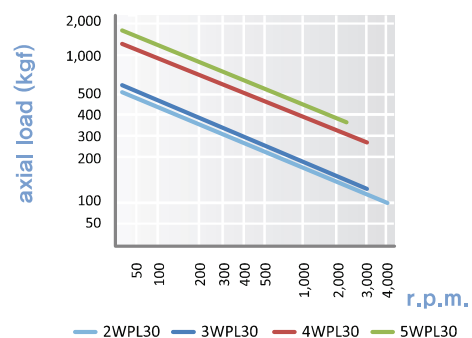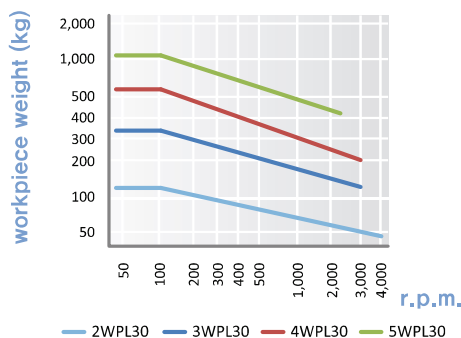

WPL30A

FEATURES ;

- Accuracy guaranteed to 0,003mm TIR (0,0001").
- Excellent for CNC lathes, grinding machines and inspection machines.
- Water proof enhanced type.
- Heat-treated point to HRC 60±2.
- Small head diameter reduces interference problem between tool holders and turning tools.
- Carbide point available (WPL30AC TYPE).
- Carbide point to HRA 90±5.

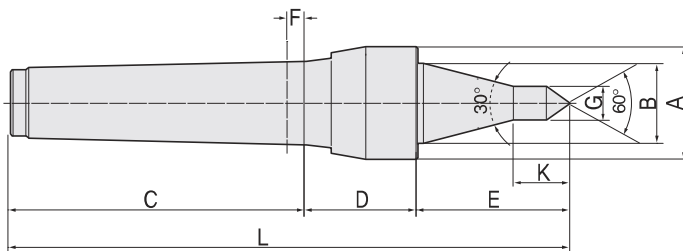

Available

Carbide Tipped Points WPL30AC-TYPE

- MT2 : 076002
- MT3 : 076003
- MT4 : 076004
- MT5 : 076005

Dimension

Unit : mm, kg

MODEL	MT	A	B	C	D	E	F	G	K	L	Workpiece Weight	Max, R.P.M	Weight	Max, Run Out
075002 (076002)	2	27.7	23.8	69	28	42	4.5	10	14	139	100	4,000	0.3	0.003
075003 (076003)	3	32.3	28	85	32	50	5	10	14	167	280	3,000	0.5	0.003
075004 (076004)	4	45	40	108	48	80	6	12.5	24	236	500	3,000	1.2	0.003
075005 (076005)	5	62	54	136	54	110	8	12.5	24	300	900	2,000	3.2	0.003

※ (MODEL NO) : Carbide Tip Type

WPL30A type technical data

